


# RETSOL X100

# LABEL REWINDER



- Two-Way Rewind
- Auto-Sync Rewind
- Speed Regulation Rewind
- Adjustable core rewinding

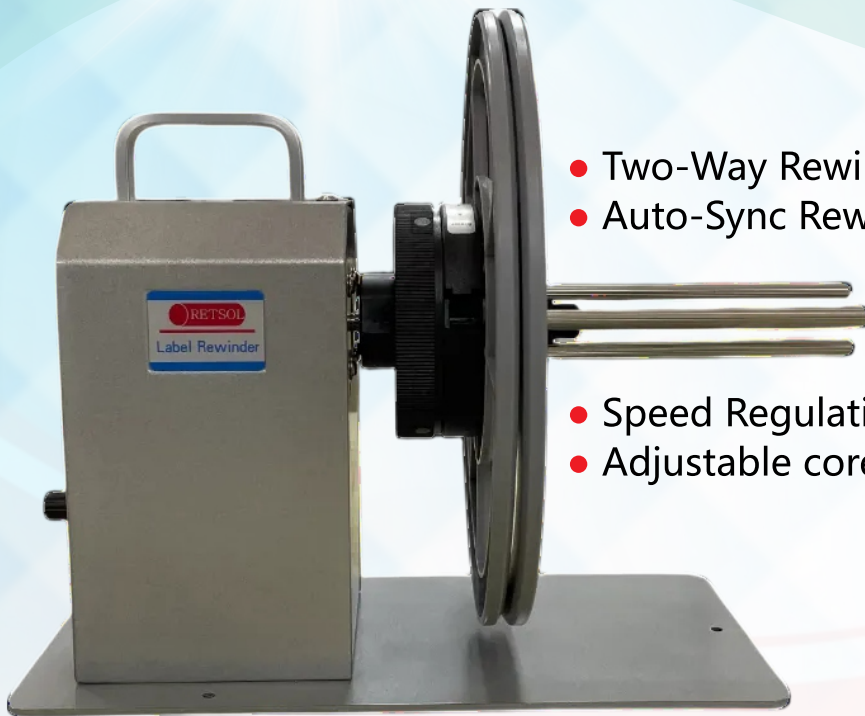

## X100

## Technical Specification

|                      |                                                                                                                                                                                                                                               |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rewind Speed         | 1~12inch/s                                                                                                                                                                                                                                    |
| Max. label Width     | 120mm                                                                                                                                                                                                                                         |
| Label Roll Diameter  | Max. O.D. 230mm                                                                                                                                                                                                                               |
| Core Diameter        | No core rewinding, 25mm-76mm (any core size rewind)                                                                                                                                                                                           |
| Rewinding Type       | Two-way Rewind, Auto-Sync Rewind, Speed Regulation Rewind                                                                                                                                                                                     |
| Induction Method     | Tension induction                                                                                                                                                                                                                             |
| Speed tuner          | Stepless speed regulation                                                                                                                                                                                                                     |
| Power                | Input: 100-240V, 50/60Hz, DC Output: 24V, 0.5/1A                                                                                                                                                                                              |
| Dimension            | (L)318*(W)230*(H)248mm                                                                                                                                                                                                                        |
| Carton size          | (L)345*(W)275*(H)300mm                                                                                                                                                                                                                        |
| Net weight           | 3.5KG                                                                                                                                                                                                                                         |
| Gross weight         | 4.6KG                                                                                                                                                                                                                                         |
| Environment          | Temperature:0-45°C.Relative humidity:25%-85%                                                                                                                                                                                                  |
| Label rewinding type | Paper/cloth/film: copperplate paper adhesive, synthetic paper, thermal paper, washing cloth/shipping mark, card/hanging tag, PET/PVC/PP,Bar code label, supervision code label, security label, all kinds of flexible film packaging material |

\* Warranty - Against Manufacturing Defects on the Label Rewinder  
Specifications are subject to change without prior notice

